

# How to install battery disconnect (on/off) switch.



**Battery Box  
without switch.  
Click mouse to  
advance to next  
page.**

**Take battery lid off and use base of switch to drill holes in lid.**





**Marinco 701 Battery Disconnect Switch\$21.18**


**Arnold MISC WEAR BC-16PN-TP 16" Battery  
Cable Set\$7.34**

**Price for both:\$28.52 from Amazon**



**Drilled Holes in Lid**

**Attach red cable to one side of switch. Will not need extra black cable. Leave other side open.**

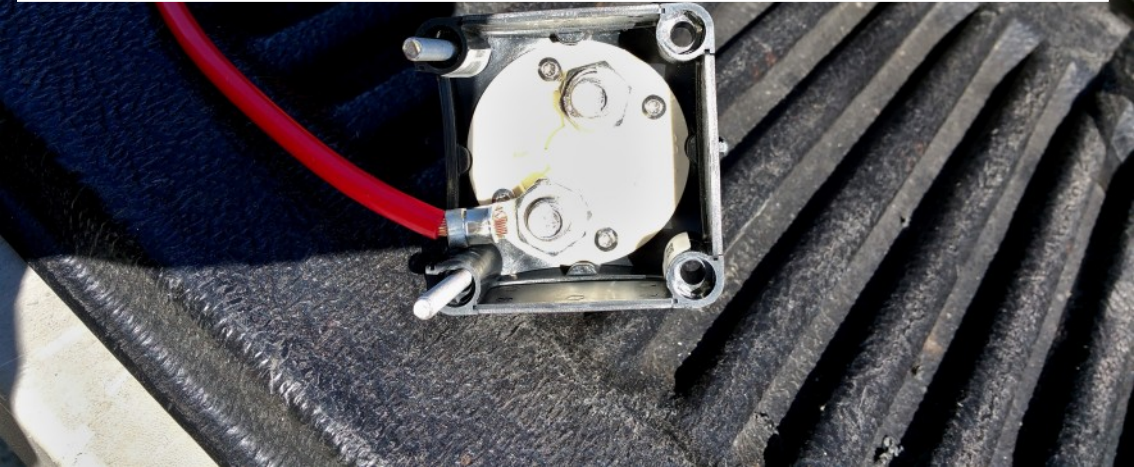



**Disconnect red lead from battery and attach to other terminal on switch. Had to drill out red connector to fit post on battery. Do not disturb white lead to battery.**



**Attach switch to lid with bolts and nuts. Attach red cable to battery.**





**Replace and tie down lid with installed disconnect switch.  
Turn switch to red to disconnect battery - green to turn on.**

**Switch is in on position.**

**Turn counter clockwise to turn off (red).**

