


FP-4170 REPAIR KIT FOR FLEXCO STEPS

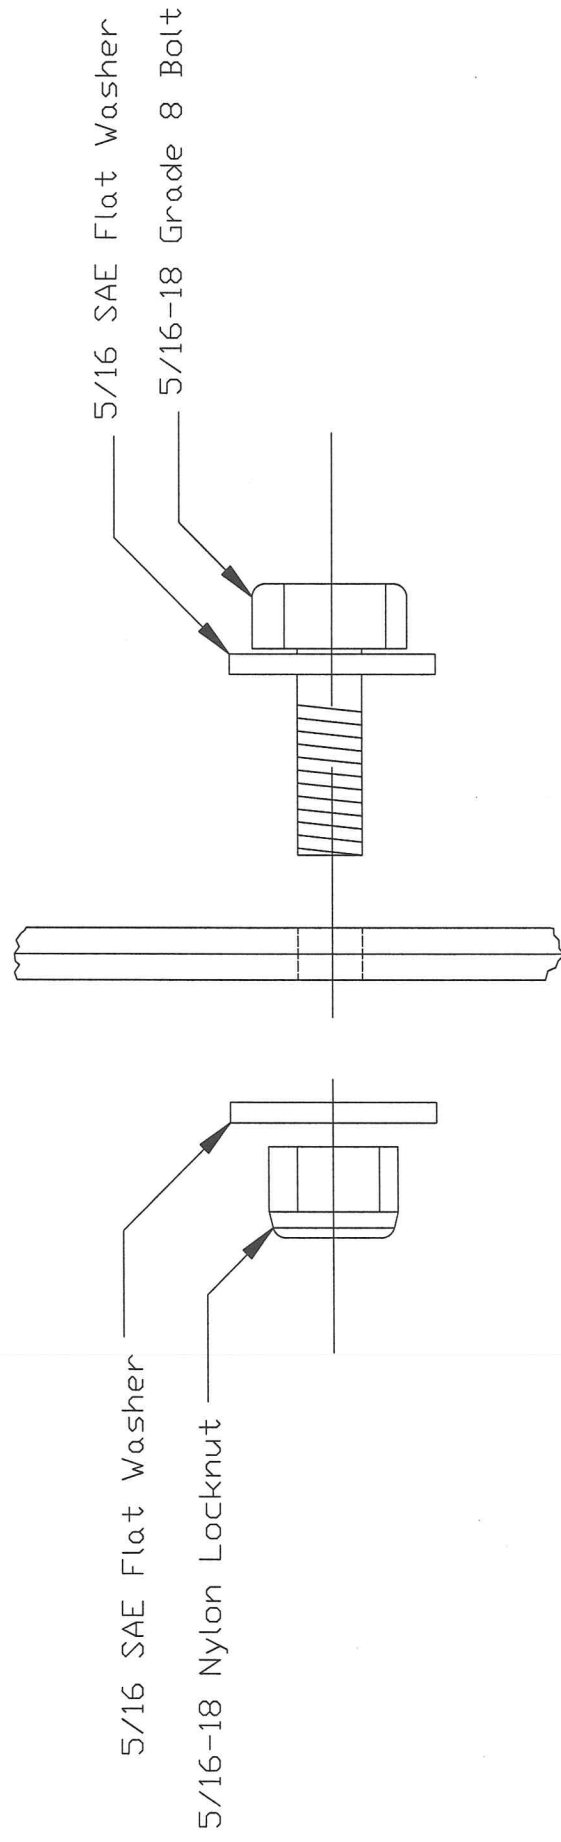

Installation Instructions:
Remove broken rivet.
Drill holes with a 5/16" drill (DO NOT SUBSTITUTE).
Install bolt with washer on each side of step brackets.
Tighten nylon locknut snug - to pull parts tight together.
Do not overtighten.
Parts must pivot with slight resistance when properly adjusted.