

LEVELING AND STABILIZATION

To Manually Override Leveling Jacks and/or Slideouts:

1. Locate all valves that operate the leveling jacks and the slideout. There will be four leveling jack valves and one slideout valve. The slideout valve will have two black hoses entering the port whereas the leveling jacks will only have one black hose each (Fig. 9).
2. Locate the hex head receptacle at the end of the valve. This is the manual override for the valve. It should normally be in the fully counterclockwise position (Fig. 1). By turning the manual override clockwise with a 1/8" Allen wrench, the valve is manually overridden (Fig. 2).
3. Isolator Valve - Blue Knurled Knob in normal operation position (Fig. 3).
4. Push Blue Knurled Knob in towards manifold (Fig. 4).
5. Turn knob to the left until it stops; approximately 1/4 turn (Fig. 5).
6. Release knob. Blue Knurled Knob should now be extended for manual override operation (Fig. 6).
7. Remove plastic cap (Fig 7A).
8. Disconnect power cables on the motor (Fig. 7B).
9. Using a 1/2" socket, insert into auxiliary drive device, i.e. cordless or power drill.
10. Insert 1/2" socket onto coupler found under plastic cap (Fig. 8).
11. Run drill in reverse or counterclockwise to retract jacks.
12. Once the leveling jacks and slideout have completed their operation, turn all manual overrides to the normal or counterclockwise position to close the valves (Fig. 1).

Fig. 1



Fig. 2



Fig. 3

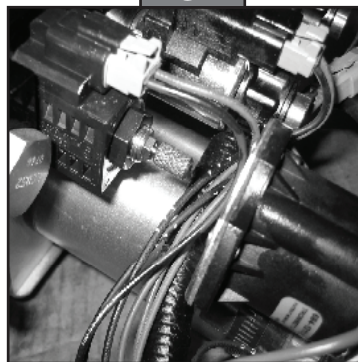


Fig. 4

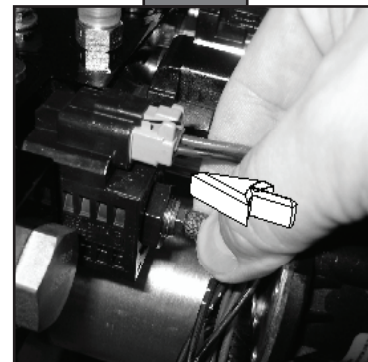


Fig. 5

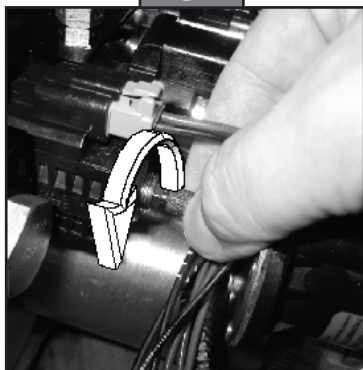


Fig. 6

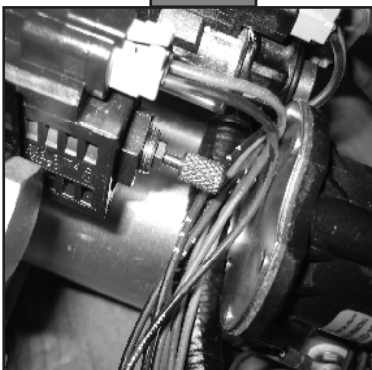


Fig. 7



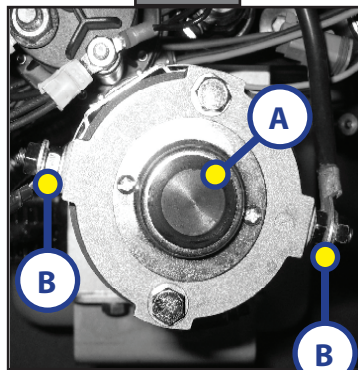


Fig. 8

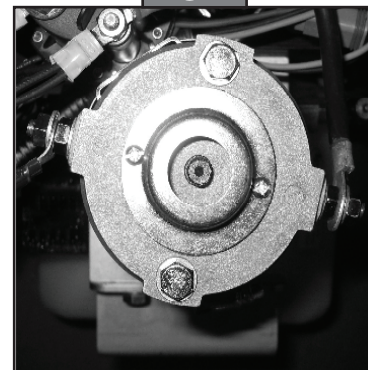

LEVELING AND STABILIZATION

Fig. 9

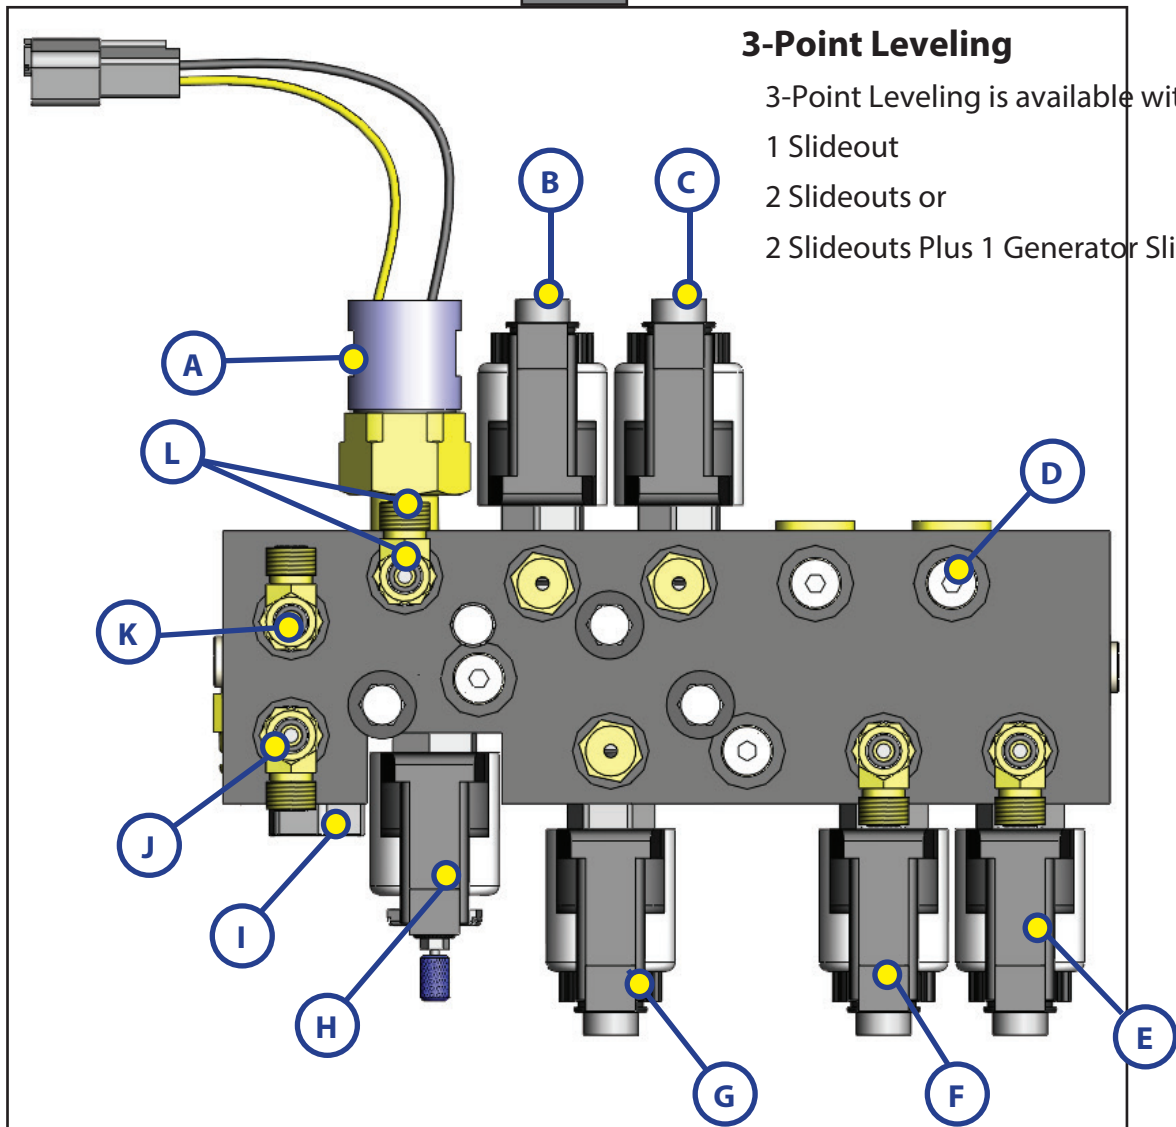

- A.** Pressure Switch - Blue & Black Wires connect to Yellow & Black Wires
- B.** Left Rear Extend Valve & Port- Leveling - Straight Fitting - Blue Hose Marker - Blue & Black Wires
- C.** Right Rear Extend Valve & Port- Leveling - Straight Fitting - Red Hose Marker - Red & Black Wires
- D.** Extend Valve & Port (Genslide Option) - Genslide for 3-point +3 Only - Straight Fitting - Purple w/ white stripe Hose Marker - Purple & Black Wires
- E.** Extend Valve & Port - Slideout 2 - "T" Fitting - Orange Hose Marker - Orange & Black Wires
- F.** Extend Valve & Port - Slideout 1 - "T" Fitting - Tan Hose Marker - Tan & Black Wires
- G.** Front Extend Valve & Port - Leveling - Straight Fitting - Green Hose Marker - Green & Black Wires
- H.** Isolator Valve - Green & Black Wires
- I.** Flow Divider
- J.** Rear Retract Port - Slideout - "T" Fitting - Tan & Black Hose Marker
- K.** Front Retract Port - Slideout - "T" Fitting - Tan & Black Hose Marker
- L.** Retract Port - Leveling - "T" Fitting - Blue & Black Hose Marker - Green & Black Hose Marker


Contact us: Lippert Components Inc. - www.lci1.com/customerservice - Phone: (574) 537-8900 - Email: warranty@lci1.com

LEVELING AND STABILIZATION

Fig. 10

4-Point Leveling

4-Point Leveling is available with one or two slideouts.

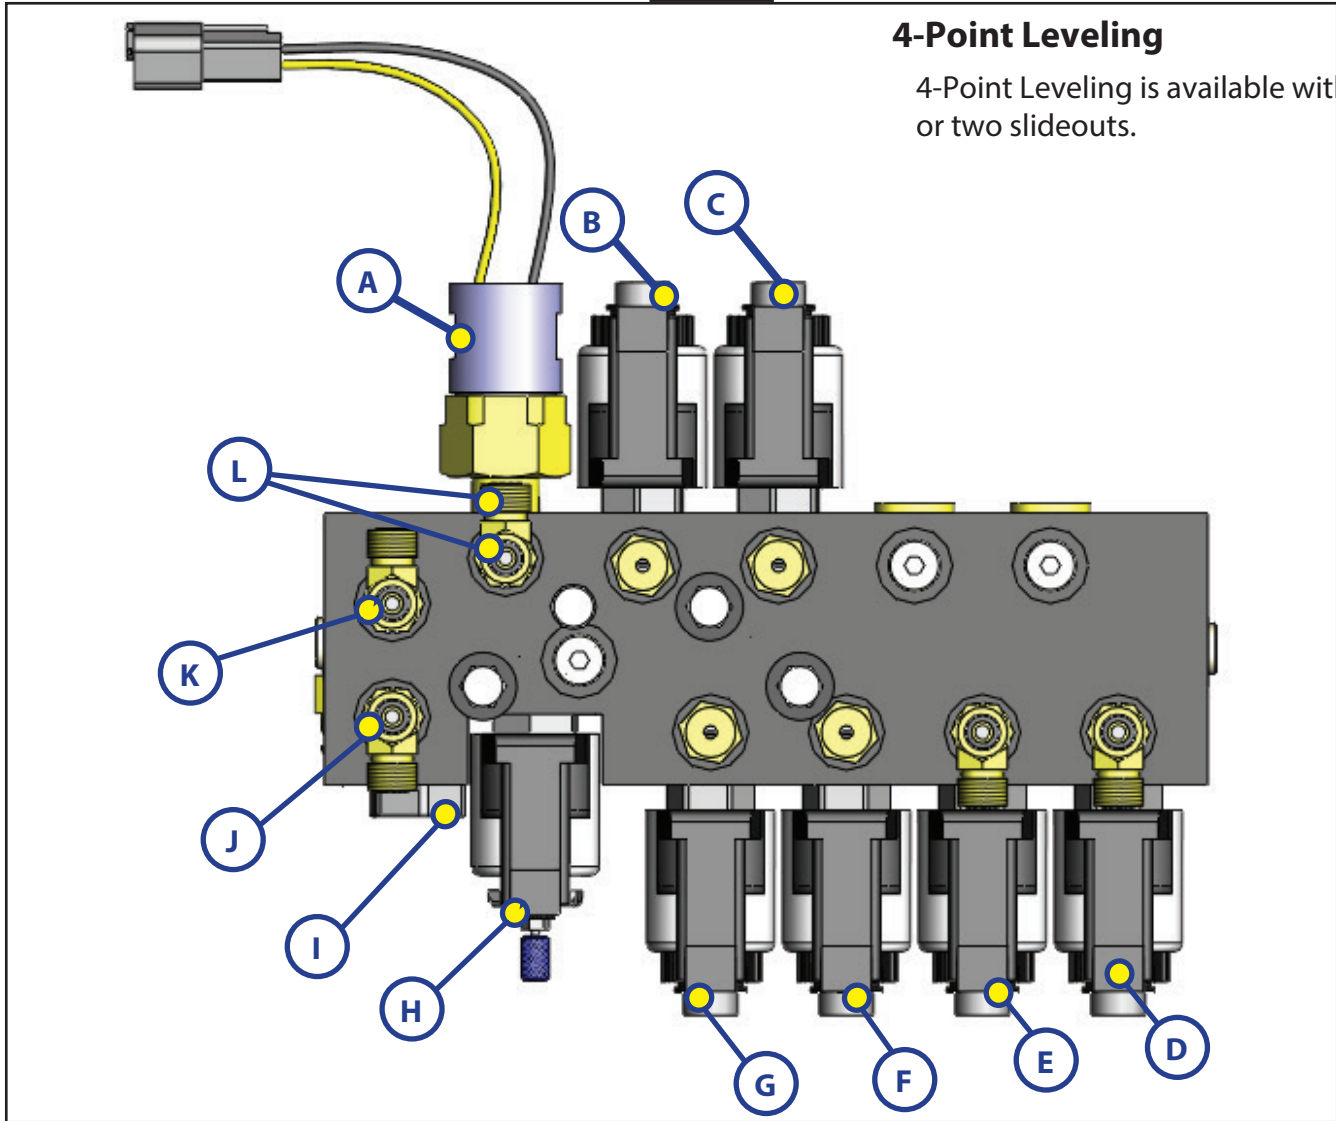

- A.** Pressure Switch - Blue & Black Wires connects to Yellow & Black Wires
- B.** Left Rear Extend Valve & Port - Leveling - Straight Fitting - Red Hose Marker - Red & Black Wires
- C.** Right Rear Extend Valve & Port- Leveling - Straight Fitting - Red Hose Marker - Red & Black Wires
- D.** Extend Valve & Port - Slideout 2 - "T" Fitting - Orange Hose Marker - Orange & Black Wires
- E.** Extend Valve & Port - Slideout 1 - "T" Fitting - Tan Hose Marker - Tan & Black Wires
- F.** Right Front Extend Valve & Port - Leveling - Straight Fitting - Purple Hose Marker - Purple & Black Wires
- G.** Left Front Extend Valve & Port - Leveling - Straight Fitting - Green Hose Marker - Green & Black Wires
- H.** Isolator Valve - Green & Black Wires
- I.** Flow Divider
- J.** Rear Retract Port - Slideout - "T" Fitting - Tan & Black Hose Marker
- K.** Front Retract Port - Slideout - "T" Fitting - Tan & Black Hose Marker
- L.** Retract Port - Leveling - "T" Fitting - Blue & Black Hose Marker - Green & Black Hose Marker

Contact us: Lippert Components Inc. - www.lci1.com/customerservice - Phone: (574) 537-8900 - Email: warranty@lci1.com